


# BRICK PAVING DETAIL

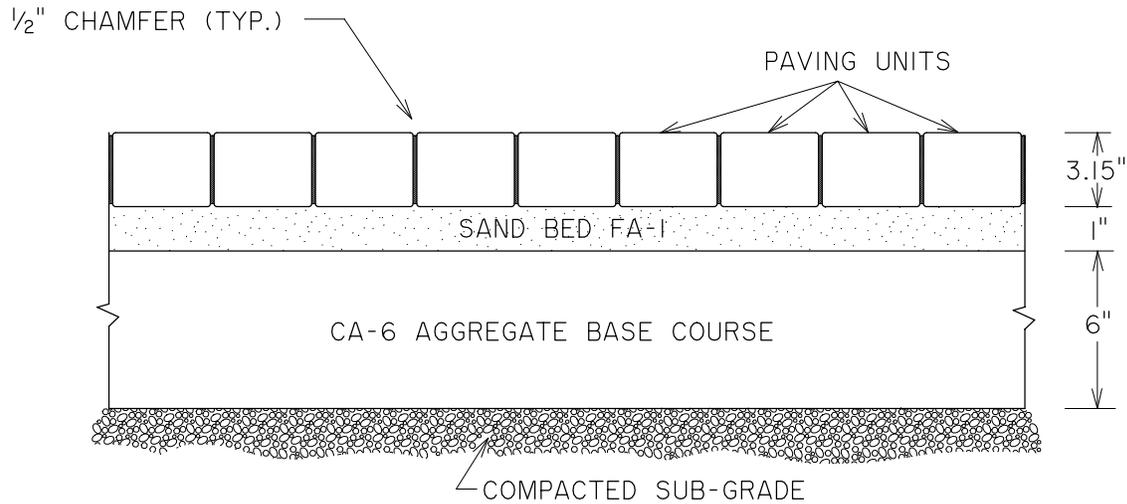

## NOTES

1. PLACEMENT OF PAVER BRICKS OR STAMPED CONCRETE REQUIRE A NON STANDARD PAVEMENT, NOTORIZED PERMIT AGREEMENT AND A "COVENANT RUNNING WITH THE LAND" DOCUMENT, WHICH MUST BE RECORDED AT KANE COUNTY RECORDERS OFFICE PRIOR TO CONSTRUCTION.
2. THE SAND FOR THE BEDDING LAYER SHALL BE DELIVERED TO THE SITE A MINIMUM OF 24 HOURS PRIOR TO PLACEMENT TO ALLOW FOR THE MOISTURE TO DRAIN FROM THE MATERIAL.
3. THE SAND BED SHALL BE COMPACTED PRIOR TO PLACEMENT OF THE PAVER BRICKS. DISTURBED AREAS OR SCREEDED AREAS LEFT OVERNIGHT SHALL BE REMOVED AND RESCREEDED. FOLLOWING THE PLACEMENT OF THE PAVER BRICKS, FA-1 SAND SHALL BE SPREAD ACROSS THE SURFACE OF THE SURFACE OF THE PAVERS AND COMPACTED WITH A VIBRATORY PLATE COMPACTOR.
4. THE BASE COURSE SHALL BE CONSTRUCTED OF CA-6 MATERIAL COMPACTED IN TWO LIFTS.
5. EDGE RESTRAINT SHALL BE PROVIDED ON ALL SIDES OF THE PAVER CONSTRUCTION IN THE FORM OF STANDARD CURB AND GUTTER, SIDEWALK, OR THE TYPICAL EDGE RESTRAINT SHOWN ABOVE
6. UNDERCUTS AND THE CONSTRUCTION OF A SUBBASE SHALL OCCUR AS NECESSARY TO ENSURE THE STRUCTURAL STABILITY OF THE ROADWAY.

NOT TO SCALE

BRICK  
PAVING  
DETAIL

DATE: 3-31-09