




A. FLEXIBLE PAVEMENT

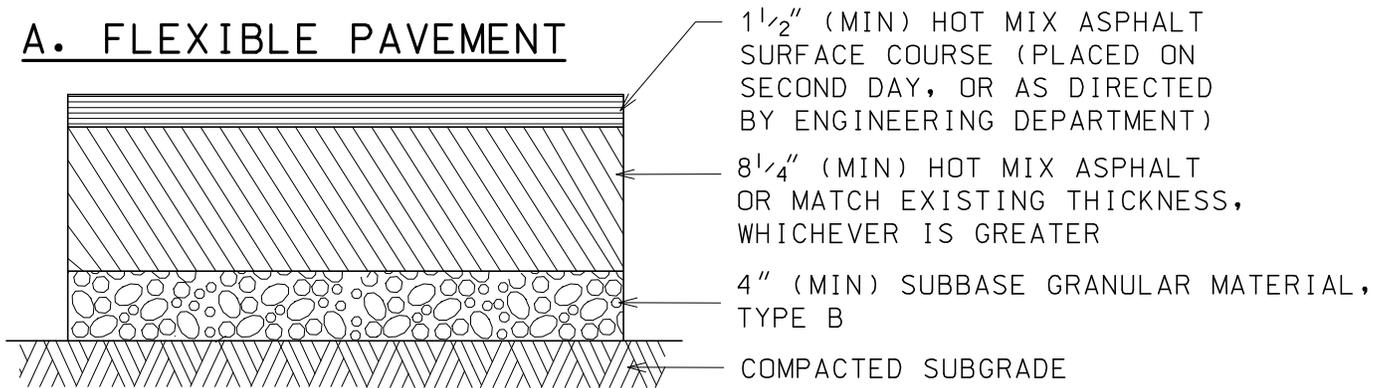

B. RIGID PAVEMENT

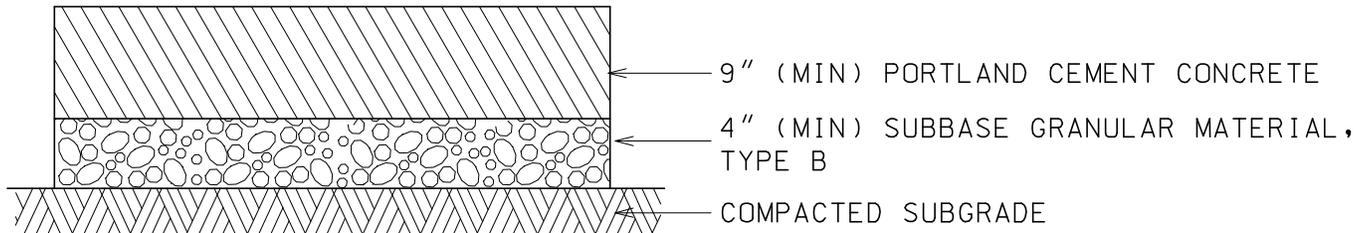

C. COMPOSITE PAVEMENT

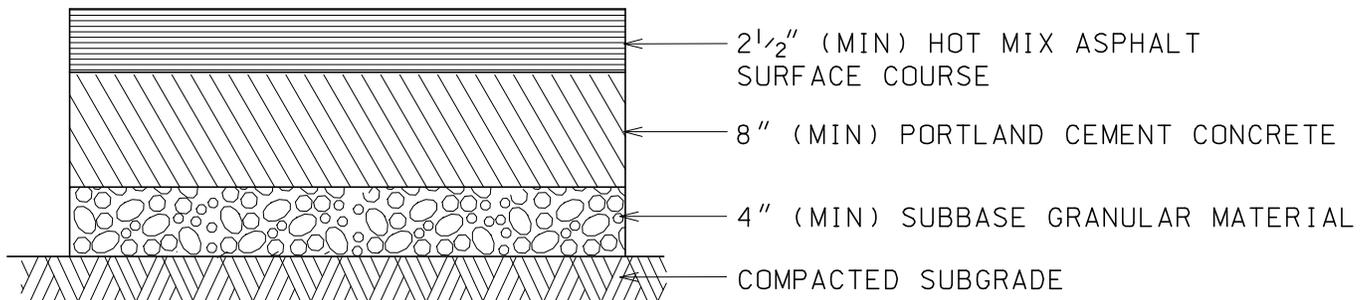

NOTE:

SECTIONS REPRESENT THE MINIMUM CROSS SECTION ALLOWED.

1. HOT MIX ASPHALT SURFACE & BINDER COURSE SHALL CONFORM TO IDOT HMA MIX SELECTION TABLE.
2. PORTLAND CEMENT CONCRETE SHALL CONFORM TO IDOT CLASS PV, MIN. 3500 PSI (6.1 BAG MIX) AT 14 DAYS. WITH 5% TO 8% AIR ENTRAINMENT. (NO FLY ASH ALLOWED)
3. ALL SUBGRADE SHALL HAVE A MINIMUM ILLINOIS BEARING RATIO (IBR) OF 3.0, AND BE COMPACTED TO AT LEAST 90% MODIFIED PROCTOR DENSITY (ASTM D-1557)

NOT TO SCALE

MINIMUM
PAVEMENT
DETAILS

DATE: 2-3-10