


BRICK PAVING DETAIL

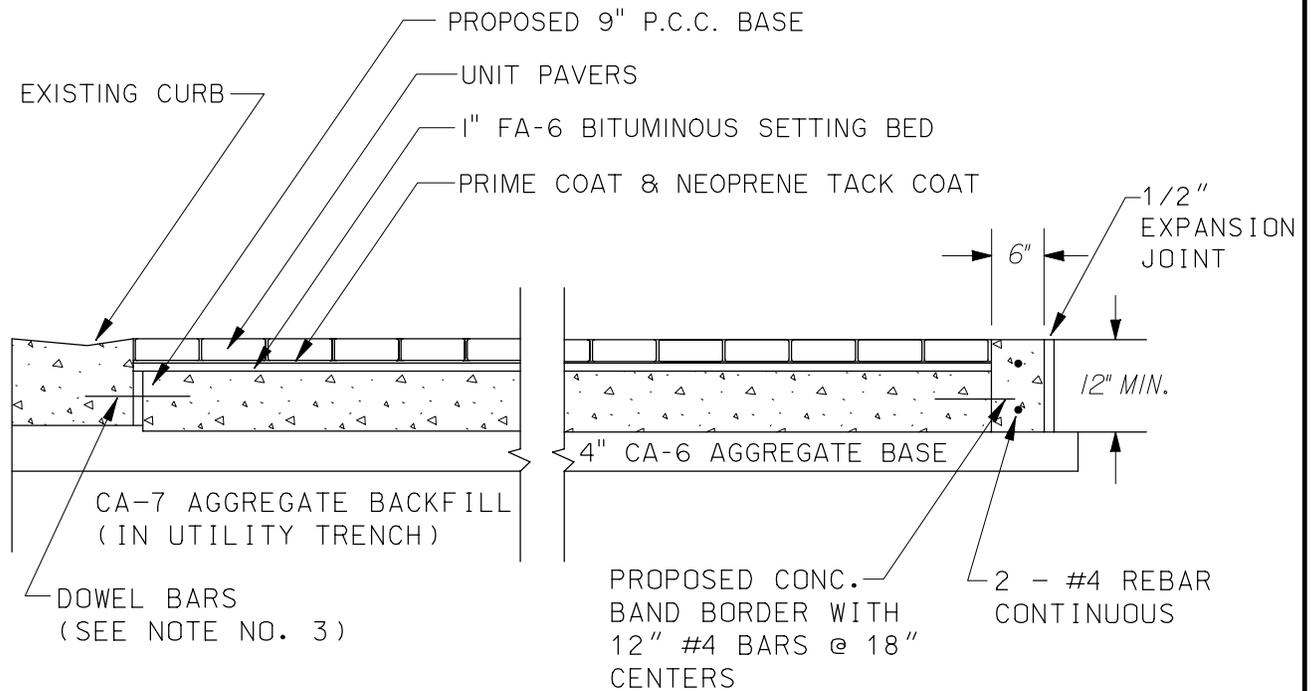

NOTES

1. PLACEMENT OF P.C.C. AND PAVING BRICKS SHALL BE DONE IN PHASES TO ENSURE THAT STREET IS OPEN TO TRAFFIC AT ALL TIMES UNLESS STREET CLOSURE IS PERMITTED BY ENGINEER.
2. P.C.C. SHALL CONSIST OF IDOT CLASS SI (6.1 BAG MIX) CONCRETE, WITH 5% TO 8% AIR ENTRAINMENT, AND A MINIMUM COMPRESSIVE STRENGTH OF 3,500 PSI AT 14 DAYS.(NO FLY ASH ALLOWED)
3. REFER TO IDOT STANDARD 442101-07 (CLASS B PATCHES) FOR DOWEL BAR AND JOINT DETAILS FOR P.C.C. BASE.

NOT TO SCALE

BRICK PAVING
IN ROADWAY

DATE: 1-18-12