



## DEPRESSED CURB

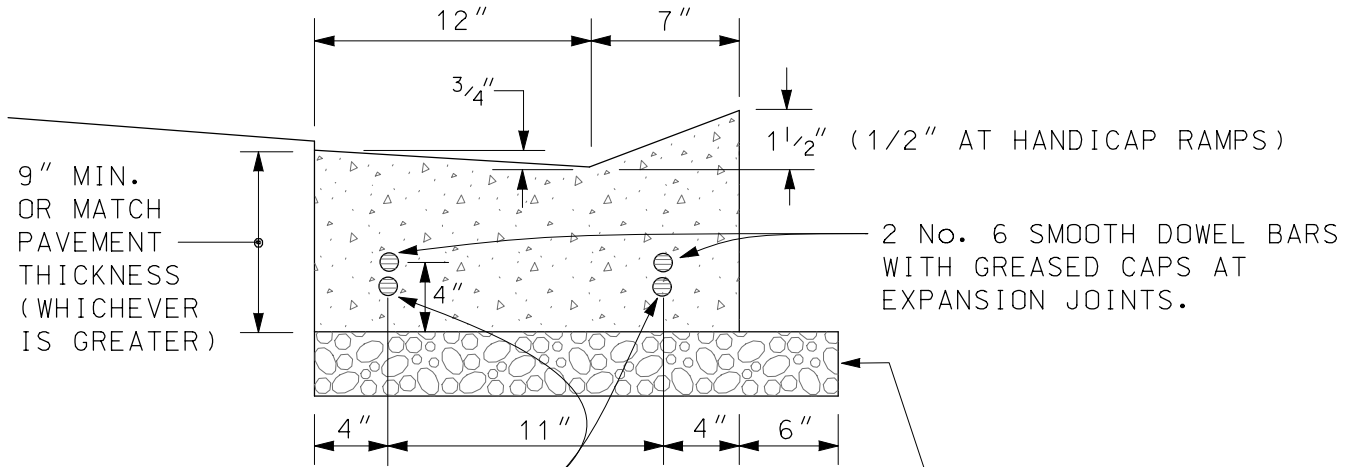

INSTALL 2 CONTINUOUS BARS  
TIED TO EXISTING CURB AND GUTTER.  
#4 BARS IN RESIDENTIAL,  
#6 BARS IN COMMERCIAL/INDUSTRIAL

IDOT CA-6 CRUSHED  
STONE BASE, 4" MIN  
(WHERE APPLICABLE)

## B4.12 CURB & GUTTER

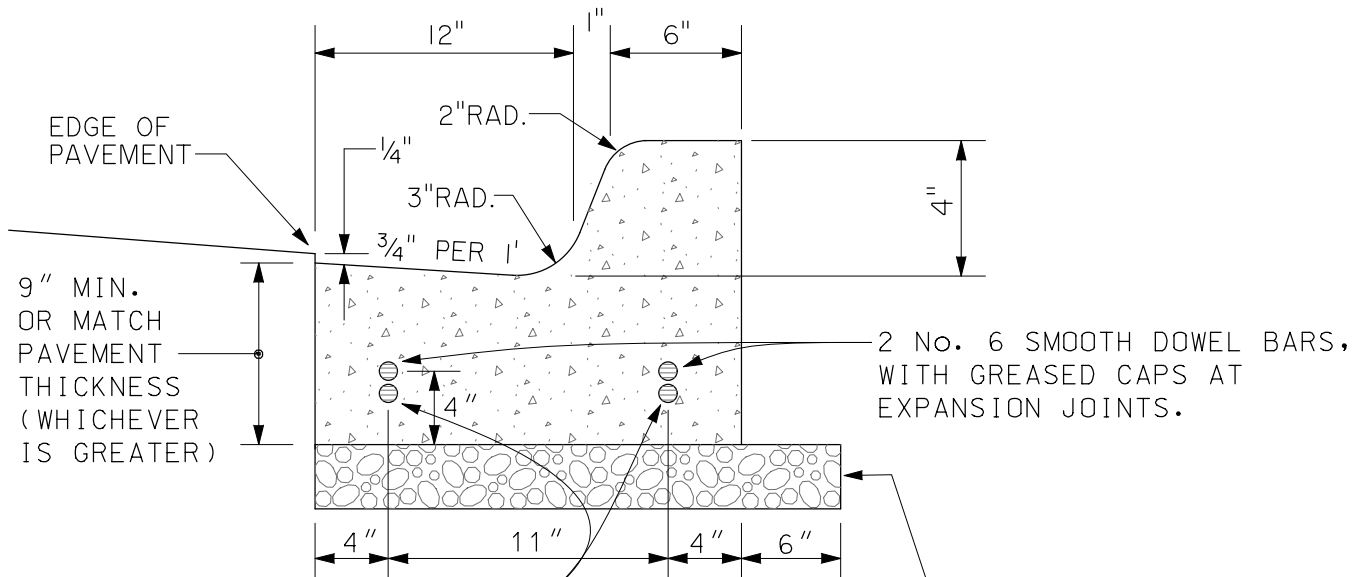


INSTALL 2 CONTINUOUS BARS  
TIED TO EXISTING CURB AND GUTTER.  
#4 BARS IN RESIDENTIAL,  
#6 BARS IN COMMERCIAL/INDUSTRIAL

IDOT CA-6 CRUSHED  
STONE BASE, 4" MIN  
(WHERE APPLICABLE)

### NOTES:

1. CONTRACTION JOINTS SHALL BE PLACED AT 15' INTERVALS, AND SHALL BE FORMED BY SAW CUTTING TO A DEPTH OF AT LEAST TWO INCHES.
2. EXPANSION JOINTS SHALL BE PLACED AT 60' (MAX) INTERVALS, AT ALL POINTS OF CURVATURE, AND AT THE END OF EACH POUR.



**CITY OF ST. CHARLES**  
ILLINOIS • SINCE 1834  
*Pride of the Fox*

### TYPE B4.12 COMBINATION CONCRETE CURB & GUTTER

DATE: 9-10-2021

NOT TO SCALE

REVISED:

DRAWING NO. E-01