## **ELEVATION CERTIFICATE**

O.M.B. No. 3067-0077 Expires July 31, 1999

---

## FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMA). You are not required to respond to this collection of information unless a valid OMB control number is displayed in the upper right corner of this form.

Instructions for completing this form can be found on the following pages.

SECTION A PROPERTY INFORMATION	FOR INSURANCE COMPANY USE	
BUILDING OWNER'S NAME Mark Leaman	POLICY NUMBER	
STREET ADDRESS (Including Apt., Unit, Suite and/or Bidg. Number) OR P.O. ROUTE AND BOX NUMBER  4117 Royal TVDON Cov4  OTHER DESCRIPTION (Lot and Block Numbers, etc.)  Lot 61 11 The Royal Fox	COMPANY NAIC NUMBER	
STATE 12	ZIP CODE GO174	
SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORMATION		
Provide the following from the proper FIRM (See Instructions):		
1. COMMUNITY NUMBER 2. PANEL NUMBER 3. SUFFIX 4. DATE OF FIRM INDEX 5. FIRM 201 170896 0040 A March 1, 1982 A3	8. BASE PLOOD ELEVATION (in AO Zones, use depth)	
7. Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE): NGVD '29 Other (describe on back) 8. For Zones A or V, where no BFE is provided on the FIRM, and the community has established a BFE for this building site. Indicate the community's BFE: i i i feet NGVD (or other FIRM datum—see Section B, Item 7).		
SECTION C BUILDING ELEVATION INFORMATION		
<ol> <li>Using the Elevation Certificate Instructions, indicate the diagram number from the diagrams found of describes the subject building's reference level.</li> <li>FIRM Zones A1-A30, AE, AH, and A (with BFE). The top of the reference level floor from the set of 1750. First Zones V1-V30, VE, and V (with BFE). The bottom of the lowest horizontal structural members the selected diagram, is at an elevation of 1   1   1   1   1   1   1   1   1   1</li></ol>	ected diagram is at an elevation  per of the reference level from a Section B, Item 7).  Lill teet above or  of above or below (check ing's lowest floor (reference No Unknown IGVD '29 Other (describe	
4. Elevation reference mark used appears on FIRM: X Yes \( \subseteq \text{No (See Instructions on Page 4)} \)		
5. The reference level elevation is based on: actual construction construction drawings (NOTE: Use of construction drawings is only valid if the building does not yet have the reference level floor in place, in which case this certificate will only be valid for the building during the course of construction. A post-construction Elevation Certificate will be required once construction is complete.)		
6. The elevation of the lowest grade immediately adjacent to the building is: 1 1749. 6 feet NG Section 8, Item 7).	/D (or other FIRM datum-see	
SECTION D COMMUNITY INFORMATION		
1. If the community official responsible for verifying building elevations specifies that the reference level is not the "lowest floor" as defined in the community's floodplain management ordinance, the elevation floor" as defined by the ordinance is:	on of the building's "lowest	

DEDI ACCC ALL SUCIACVIC POPPOLIS

## SECTION E CERTIFICATION


This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE),V1–V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available.

The second D MA is a section 1001.

_ James P. Meler		
Director of Landand Water K	esources Balsama Dia	ix seals Engineering Company
TITLE	0013071	- 1917 tenna Company
One South 376 Summit A	W. Oakbroik Terrace	,
SIGNATURE	4/27/98	12 6018 630-629-9860 ZIP
SIGNATURE	DATE	PHONE
COMMENTS:	MES P. M.	
COMMENIS:	1.00	
	# 62-081277 P	
	PROFESSIONAL # ENGINEER	
	RUNCIS A	
	Water Committee of the	

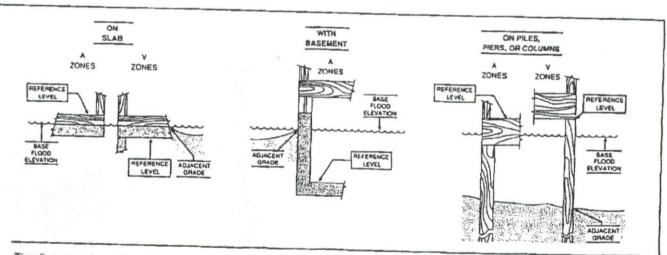

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.