



AGENDA ITEM EXECUTIVE SUMMARY

Title: Woods of Fox Glen Creek Stabilization Project Update

Presenter: Karen Young

Please check appropriate box:

	Government Operations	X	Government Services 01.25.2015
	Planning & Development		City Council

Estimated Cost:	n/a	Budgeted:	YES		NO	
-----------------	-----	-----------	-----	--	----	--

Executive Summary:

The Woods of Fox Glen Creek Stabilization Project began construction in Fall 2015. The project is being completed to address the severe erosion that has taken place over time in this area. The first phase of the project was completed in December and included creek bank grading, installation of the concrete weir, gabion baskets and stone work in the creek channel. The contractor will return in the spring to complete the tree and landscape plantings, which will provide additional bank stabilization.

Attachments: *(please list)*



Project photos.

Recommendation / Suggested Action *(briefly explain):*

For information only.

For office use only: Agenda Item Number: 4.c

Woods of Fox Glen Creek Restoration Project

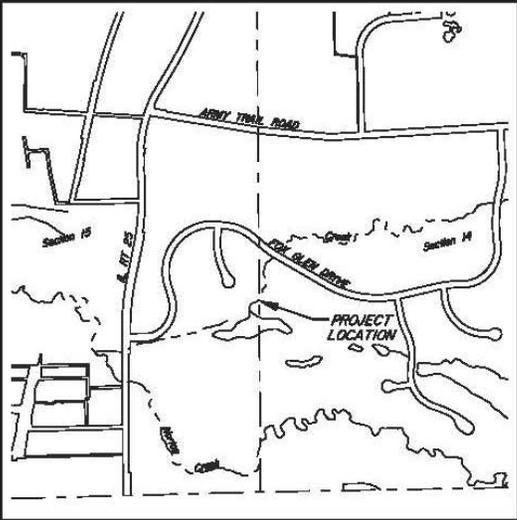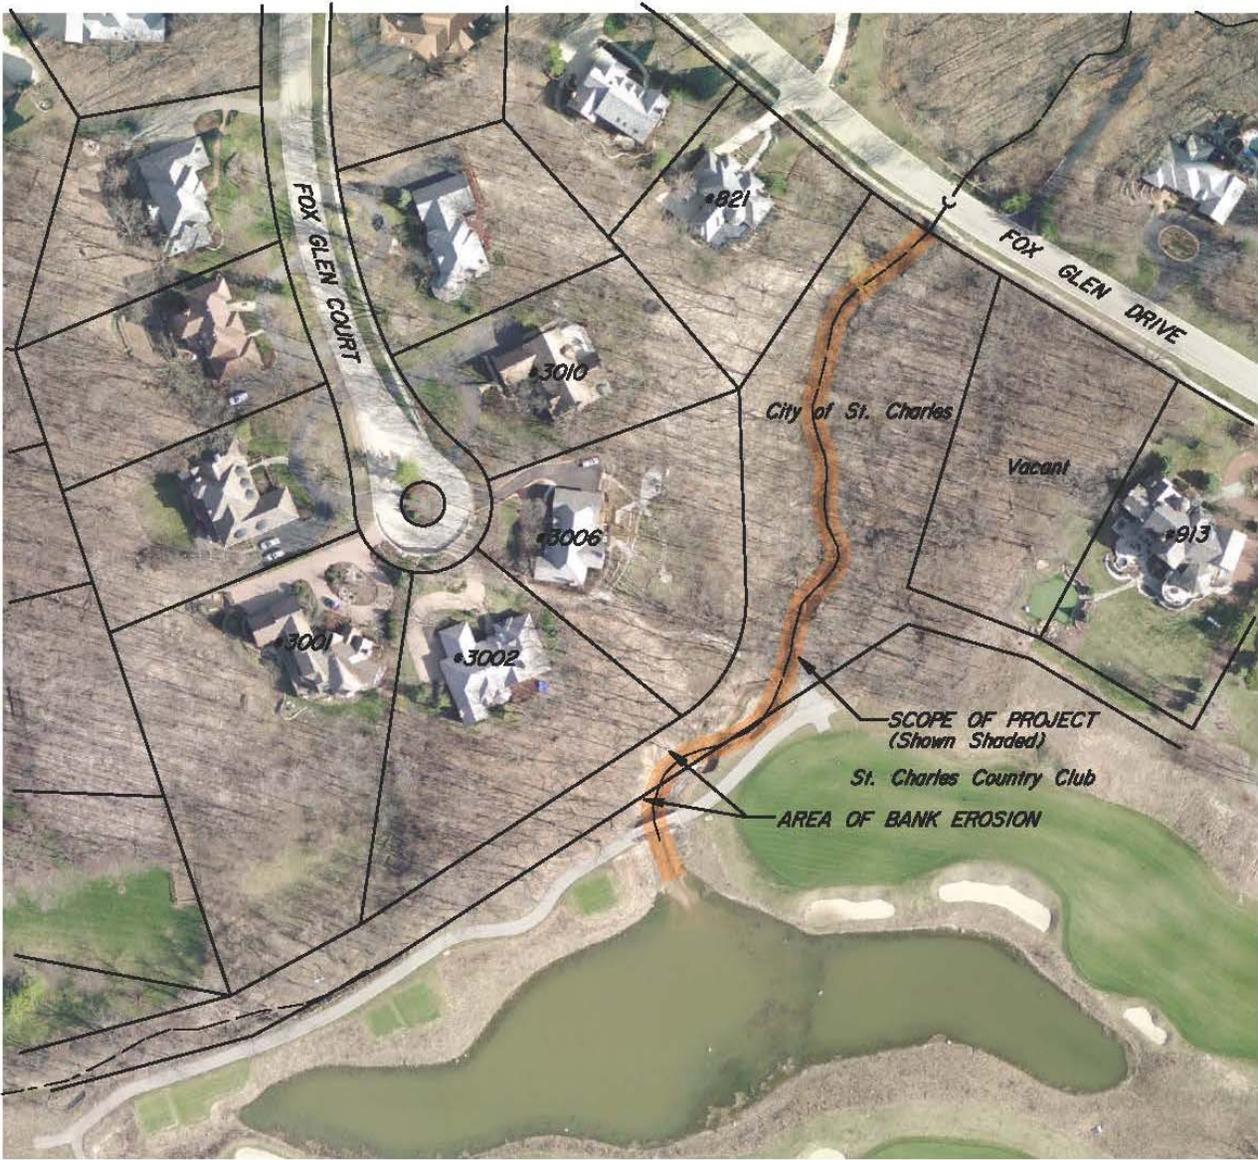

LOCATION MAP
 Section 14 & 15, T 40 N, R 8 E of the 3rd PM

NORTON CREEK TRIBUTARY



DATE: MARCH 11, 2010
 AERIAL: SPRING 2008



Disclaimer:
 This work was created for planning purposes only and is provided as is, without warranty of any kind, either expressed or implied. The information represented may contain proprietary and confidential property of the City of St. Charles, Illinois. Under United States Copyright protection laws you may not use, reproduce, or distribute any part of this document without prior written permission. To obtain written permission please contact the City of St. Charles at Two East Main Street, St. Charles, IL 60174.

Woods of Fox Glen Creek Restoration Project




Severe creek bank erosion typical throughout the project limits



Severe erosion at the roadway culvert under Fox Glen Drive

Woods of Fox Glen Creek Restoration Project

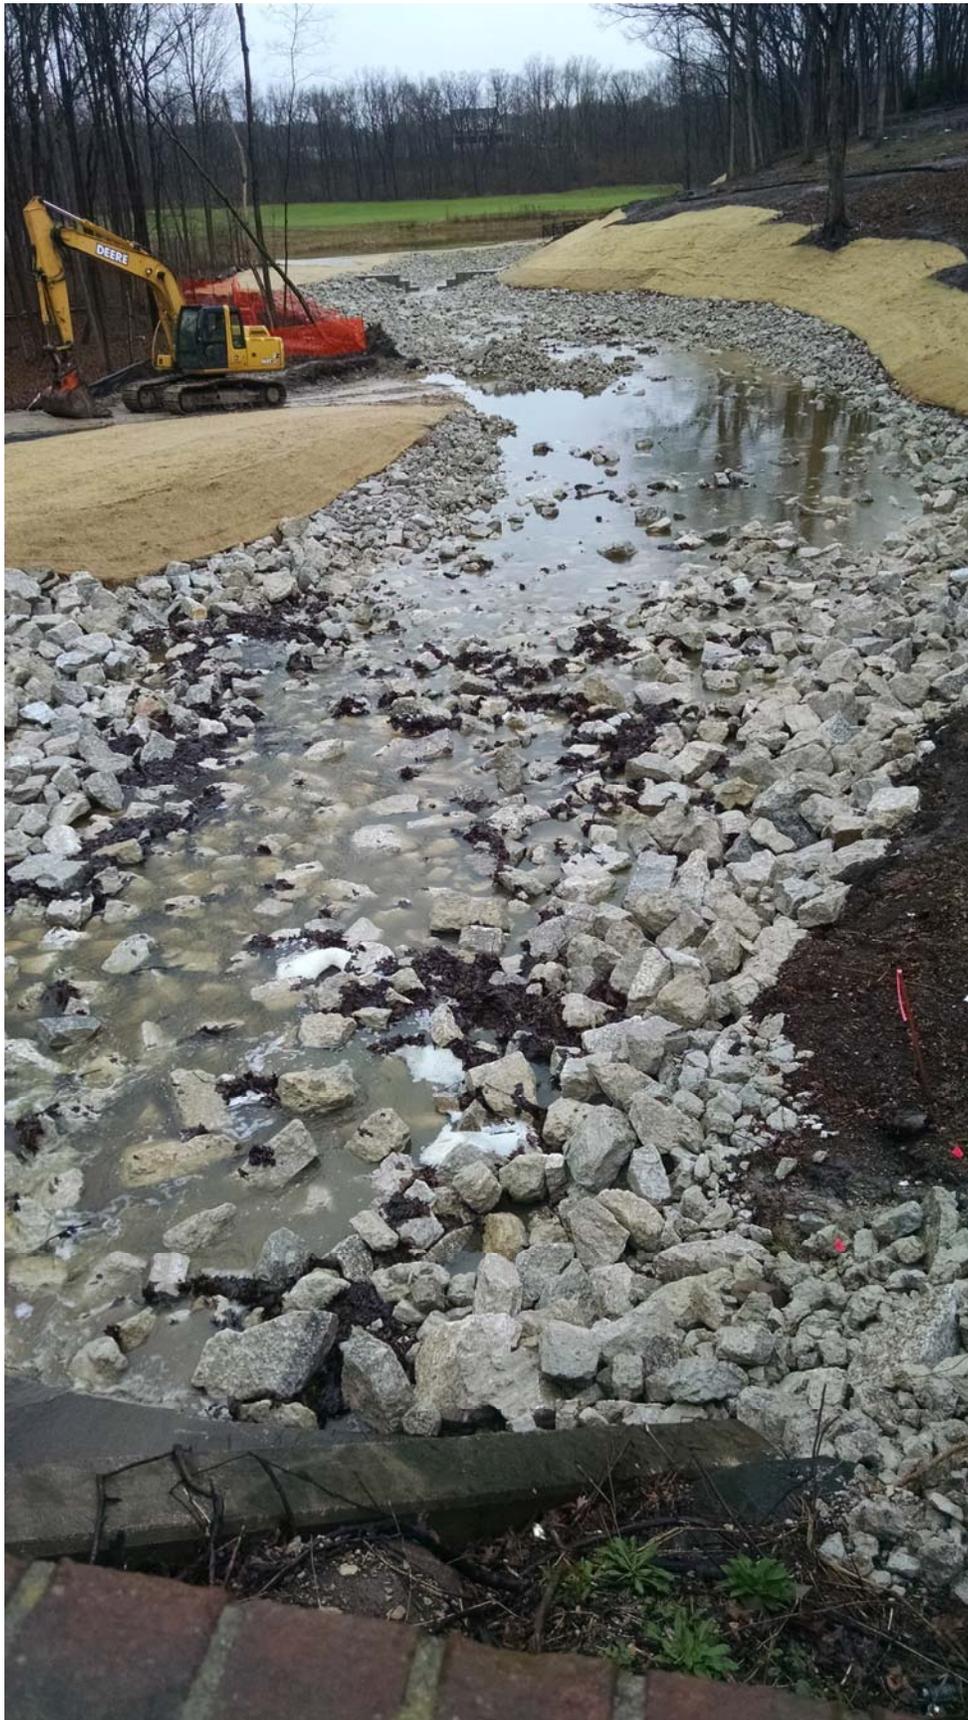

Looking south from Fox Glen Drive
Final construction stage showing newly constructed creek channel
with gentler slopes and stabilized creek bed

Woods of Fox Glen Creek Restoration Project



Weir structure installed to pool water and control water flow within project limits



**Looking south towards the St. Charles Country Club
Final construction stage showing newly constructed creek channel
with gentler slopes and stabilized creek bed**